(19) World Intellectual Property Organization

International Bureau





(43) International Publication Date 6 October 2005 (06.10.2005)

PCT

(10) International Publication Number WO 2005/093885 A2

(51) International Patent Classification⁷: H01M 8/04

(21) International Application Number:

PCT/JP2005/003421

(22) International Filing Date: 23 February 2005 (23.02.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

2004-089857 25 March 2004 (25.03.2004) JJ

(71) Applicant (for all designated States except US): NISSAN MOTOR CO., LTD. [JP/JP]; 2, Takara-cho, Kanagawa-ku, Yokohama-shi, Kanagawa, 2210023 (JP).

(72) Inventor; and

(75) Inventor/Applicant (for US only): MORITA, Koji [JP/JP]; 257-4-205, Yatsu-cho, Kanazawa-ku, Yoko-hama-shi, Kanagawa, 2360016 (JP).

(74) Agent: GOTO, Masaki; Shoyu-Kaikan, 3-1, Kasumigaseki 3-chome, Chiyoda-ku, Tokyo 1000013 (JP).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

 without international search report and to be republished upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: FUEL GAS SUBSTITUTION DEVICE FOR FUEL CELL STACK

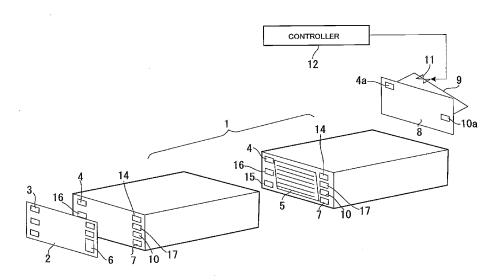

(57) Abstract: There is provided a fuel gas supply manifold (4) which extends through a plurality of cells (1) in the stacking direction and which is adapted to introduce a fuel gas to the cells (1). There are provided a bypass passage (9) connecting the downstream end of the fuel gas supply manifold (4) to the fuel gas exhaust manifold (7), and a valve (11) for opening and closing the bypass passage (9). When starting the supply of a fuel gas to the fuel gas supply manifold (4), the valve (11) is opened, whereby most of the air in the fuel gas supply manifold (4) is driven away to the exterior through scavenging by the fuel gas by way of the bypass passage (9) without causing it to pass through the interior of the cells.

